


Technical Data

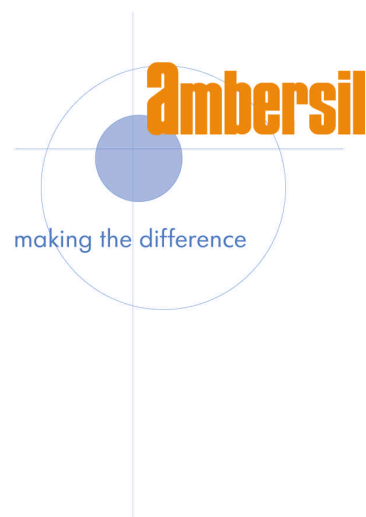

AMBERGREASE 214 **MULTI-PURPOSE SILICONE GREASE** (FORMERLY GR 214)

AMBERGREASE 214 is a clear, near-odourless, multi-purpose grease formulated from FDA listed ingredients.

BENEFITS

- Clean, tasteless and minimal odour
- Can be used at temperatures up to a continuous 160°C
- Insoluble in water and saline water
- Complies with FDA norm CFR21 food and drugs specifications (US Government)

TYPICAL USES

- Bearings, journals, cams and articulated joints
- Transmissions - fixed gear, worm screws, cog wheels etc
- Chains - all types
- Guides, columns and slippers
- Pumps and valves - including disc and ball valves
- Vending machines
- Water heaters, meters, clocking appliances
- Measuring equipment
- Navigation and radio-navigation equipment
- Stirring, mixing, crushing and pressing equipment
- Centrifugal equipment
- Packaging and wrapping equipment
- Wrapping and binding machinery
- Seal mounting
- General maintenance

TYPICAL INDUSTRIES

- Engineering and maintenance
- Plastic converting
- Agricultural
- Textile
- Wood
- Automotive
- Electrical and electronic

TECHNICAL DATA

Physical Appearance	:	Smooth grease
Colour	:	Clear
Odour	:	Minimal Odour
Grade – NGLI	:	2
4 BALL TEST - Weld Load – ASTM D 2596	:	200kg
Temperature Range, Continuous	:	-40 to +160°C
Packaging	:	1ltr

APPLICATION METHOD

Apply straight from container and spread to cover required area. Alternatively, product can be applied with a grease gun or auto-lube dispenser. It can also be brushed if desired.

STORAGE

The product may be stored at normal ambient temperatures and has a shelf life of not less than 48 months with correct storage.

HEALTH AND SAFETY

Health and Safety sheet available separately.

TECHNICAL SERVICE

CRC Industries UK Ltd provides a technical support service and maintains a constant programme of research and development. We are able to assist customers by specific product development to meet particular requirements.

MISREPRESENTATION ACT 1967

TRADE DESCRIPTIONS ACT 1968

The information given in this publication is based on our experience and reports from customers. There are many factors outside our control and knowledge which affect the use and performance of our products and for which reason no warranty is given, express or implied. Users should make their own tests to determine the applicability of such information or the suitability of any products for their own particular purposes. Statements concerning the use of the products described herein are not to be construed as recommending the infringement of any patent and no liability for infringement arising out of any such use is to be assumed.

CRC Industries UK Limited, Wylds Road, Bridgwater, Somerset, TA6 4DD

Tel: +44 (0) 1278 727200 Fax: +44 (0) 1278 425644

Web: www.ambersil.com Email: sales.uk@crcind.com

*Created: September 2010
Version: 2*